


PRO[®] CLAY

TECHNICAL DATA SHEET

ProClay[®] is an innovative tennis surface for year-round play.

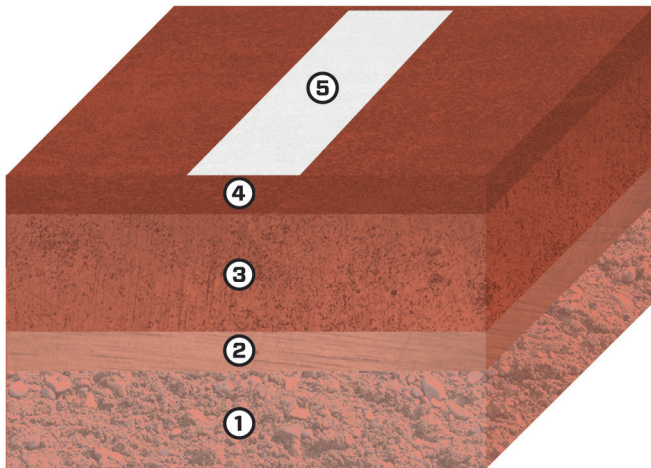

X-Section

- ① Crushed Rock Base
- ② Dimensionally Stable Backing
- ③ Fibers, Infill & PolySeal Resin
- ④ Clay Sliding Layer
- ⑤ Clay Court Tapes

ProClay[®] is a patented, natural playing surface constructed with the finest clay that is installed over a cushioned sub-structure.

PROCLAY[®]

CONSTRUCTION	Monolithic Clay
FIBER REINFORCEMENT	Polypropylene
TOTAL THICKNESS	16 MM
IN-FILL	Polyresin Bound 40/60 Sand
BACKING SYSTEM	Urethane Sealed Multi-Layer Fabric
TOTAL WEIGHT	4.5 LBS / F ²
ROLL LENGTH	120 FT
ROLL WIDTH	12 FT
SLIDING SURFACE	Fast Dry / Har Tru / Red Clay
GAME LINES	Clay Line Tapes

Standard Use:

- Clay tennis court surface.
- For facilities which want to limit down time and maintenance cost without sacrificing playability.
- Facility applications where frost or rain limit playing time.
- Perfect for rebuilding old clay courts or for new construction.

More Details:

- All materials specifications subject to manufacturing tolerances of +/- 5%.

NGISPORTS.COM
info@ngisports.com

Tel: (800) 835-0033
Fax: (423) 499-8882

2807 Walker Road,
Chattanooga, TN 37421

NGI[®]

ENGINEERED FOR SPORT