


TITANTRAX[®]

AIR

TECHNICAL DATA SHEET

Ultimate comfort and optimal energy return for the highest level of play.

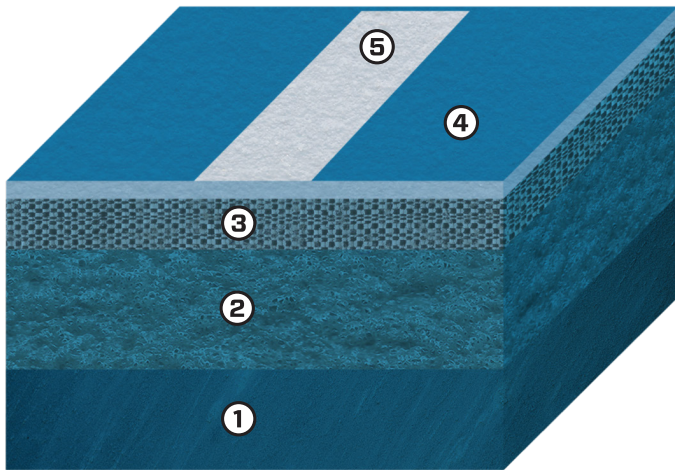

X-Section

- ① Post Tension Concrete or Asphalt Base
- ② Attached Urethane Cushion
- ③ TitanTrax Shield
- ④ Flexible Color Finish
- ⑤ Game Lines

TitanTrax Air[®] compresses under the force of impact. It maximizes force reduction to the athlete while air cells in the “AIR” cushion layer compresses, maximizing energy return to the athlete.

TITANTRAX AIR[®]

CONSTRUCTION	Dimensionally Stable Membrane with Compression Cushion
TOTAL THICKNESS	9 MM
CUSHION LAYER	Urethane Compression Foam
TOTAL WEIGHT	1.50 LBS / FT ²
DENSITY	24 LBS / IN ³
ROLL LENGTH	60 FT
ROLL WIDTH	12 FT
COMPRESSION SET	< 10%
COMPRESSION RESISTANCE	7 PSI
COLOR FINISH	Flexible Acrylic Color System

Standard Use:

- Cushioned Overlay Renovation Technology Membrane System for tennis courts, tracks, volleyball & multi-use.
- Materials designed to be attached over new asphalt and post tension concrete base.
- May be installed over cracked and/or deteriorated asphalt or concrete.

More Details:

- Installed indoors and outdoors, roof decks, loose lay or total glue down.
- Surface “Platform Compression” provides area elasticity and maximizes athlete energy return.
- All materials specifications subject to manufacturing tolerances of +/- 5%.

NGISPORTS.COM

info@ngisports.com

Tel: (800) 835-0033

Fax: (423) 499-8882

2807 Walker Road,
Chattanooga, TN 37421

NGI[®]

ENGINEERED FOR SPORT