


TITANTRAX[®]

Xtreme

TECHNICAL DATA SHEET

TitanTrax Xtreme[®] is the ideal 6MM Cushion Court overlay.

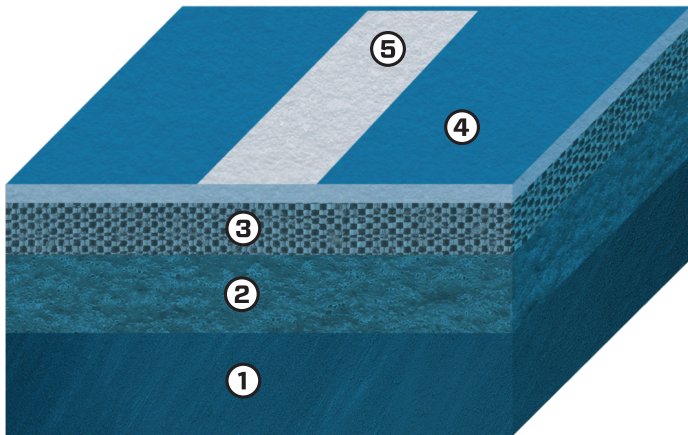

X-Section

- ① Post Tension Concrete or Asphalt Base
- ② Attached Urethane Cushion
- ③ TitanTrax Shield
- ④ Flexible Color Finish
- ⑤ Game Lines

Convert your hard court to Xtreme cushion comfort in less than half the time.

75% Force Reduction

TITANTrax Xtreme[®]

CONSTRUCTION	Dimensionally Stable Membrane with Cushion
TOTAL THICKNESS	6 MM
CUSHION LAYER	Urethane Foam
TOTAL WEIGHT	1.25 LBS / FT ²
DENSITY	20-24 LBS / IN ³
ROLL LENGTH	60 FT
ROLL WIDTH	12 FT
COMPRESSION SET	< 10%
COMPRESSION RESISTANCE	7.77 PSI
COLOR FINISH	Flexible Acrylic Color System

Standard Use:

- Cushioned Overlay Renovation Technology Membrane System for tennis courts.
- Materials designed to be installed over asphalt or concrete base.
- May be installed over cracked and/or deteriorated asphalt or concrete.

More Details:

- Force reduction values are as compared to post tension concrete.
- Surface "Platform Compression" provides area elasticity and maximizes athlete energy return.
- All materials specifications subject to manufacturing tolerances of +/- 5%.

NGISPORTS.COM
info@ngisports.com

Tel: (800) 835-0033
Fax: (423) 499-8882

2807 Walker Road,
Chattanooga, TN 37421



ENGINEERED FOR SPORT