


TITANTRAX[®] SHIELD

FOR RUNNING TRACKS

TECHNICAL DATA SHEET

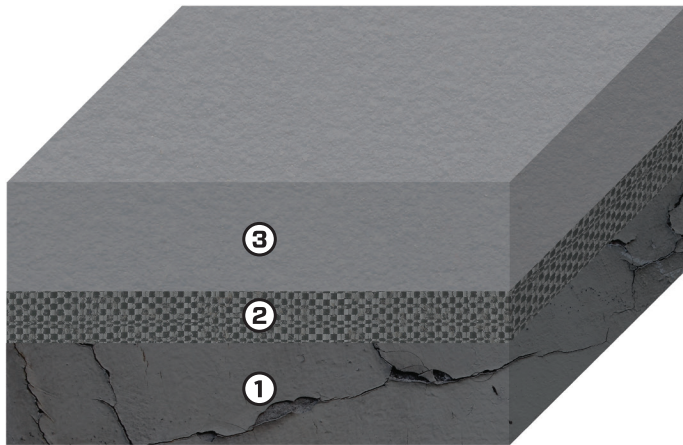

X-Section

- ① Repaired Asphalt/Concrete
- ② TitanTrax Shield
- ③ Urethane or Latex Wearing Track Surface

Shield protects the pavement below from the elements & further deterioration.

This renovation technology has a better long term life cycle & is more cost effective than repaving the track and field event areas.

TITANTRAX SHIELD[®] for running tracks

CONSTRUCTION	Dimensionally Stable Membrane
TOTAL THICKNESS	3 MM
TOTAL WEIGHT	1 LB / FT ²
ROLL LENGTH	120 FT
ROLL WIDTH	12 FT
TENSILE STRENGTH	46.5 LBS at Peak Force
ELONGATION TO BREAK	26%
SURFACE FINISH	Paved Urethane & Latex Track Surface

Standard Use:

- Fabric system for repair to large sections of track and field that are cracked
- Ideal for alligatored or checked asphalt.
- Installed over new or deteriorated asphalt and concrete surfaces.
- Protects pavement from further damage from the elements.

More Details:

- All materials specifications subject to manufacturing tolerances of +/- 5%.

NGISPORTS.COM
info@ngisports.com

Tel: (800) 835-0033
Fax: (423) 499-8882

2807 Walker Road,
Chattanooga, TN 37421

NGI[®]

ENGINEERED FOR SPORT